## SELECTION GUIDE

| Part # | Description | Package | Serial # | Status | Output Voltage vs. Power Supply | Bandwidth | Linearity | Max Common-Mode Voltage | Power Supply Current | Rise Time $t_r$ | Pinout | Mechanical Outline | Datasheet | Buy Now |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AD202KNATI → 2000V DIP | Pin out compatible with AD202KN, but output voltage is not isolated with power supply | DIP | ≤25156 | **Stop production** | Non-Isolated | 20kHz | ±0.02% | 2000V | 20mA | 18µs | Fig. 1.1 | Fig. 10.1 | PDF | - |
| | Upgraded replacement for AD202KN | DIP | >25156 | **In production** | Isolated | 800kHz | ±0.02% | 2000V | 12mA | 0.5µs | | | PDF | * * |
| AD202JNATI → 1000V DIP | Upgraded replacement for AD202JN | DIP | - | **In production** | Isolated | 800kHz | ±0.02% | 1000V | 12mA | 0.5µs | Fig. 1.2 | Fig. 10.1 | PDF | * * |
| AD202KYATI → 2000V SIP | Pin out compatible with AD202KY, but output voltage is not isolated with power supply | SIP | ≤25290 | **Stop production** | Non-Isolated | 20kHz | ±0.02% | 2000V | 20mA | 18µs | Fig. 1.3 | Fig. 10.2 | PDF | - |
| | Upgraded replacement for AD202KY | SIP | >25290 | **In production** | Isolated | 800kHz | ±0.02% | 2000V | 12mA | 0.5µs | | | PDF | * * |
| AD202JYATI → 1000V SIP | Upgraded replacement for AD202JY | SIP | - | **In production** | Isolated | 800kHz | ±0.02% | 1000V | 12mA | 0.5µs | Fig. 1.4 | Fig. 10.2 | PDF | * * |
| AD202KN | Made by Analog Device | DIP | - | **Stop production** | Isolated | 2kHz | ±0.025% | 2000V | 5mA | 180µs | - | - | - | - |
| AD202JN | Made by Analog Device | DIP | - | **Stop production** | Isolated | 2kHz | ±0.05% | 1000V | 5mA | 180µs | - | - | - | - |
| AD202KY | Made by Analog Device | SIP | - | **Stop production** | Isolated | 2kHz | ±0.025% | 2000V | 5mA | 180µs | - | - | - | - |
| AD202JY | Made by Analog Device | SIP | - | **Stop production** | Isolated | 2kHz | ±0.05% | 1000V | 5mA | 180µs | - | - | - | - |
| ATIA202KN | Obsolete, identically replaced by AD202KNATI | DIP | - | **Stop production** | Isolated | 20kHz | ±0.01% | 2000V | 12mA | 18µs | - | - | PDF | - |
| ATIA202KY | Obsolete, identically replaced by AD202KYATI | SIP | - | **Stop production** | Isolated | 20kHz | ±0.01% | 2000V | 12mA | 18µs | - | - | PDF | - |



©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/21/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 1




Figure 1.1. Photo of AD202KNATI




Figure 1.3 Photo of AD202KYATI




Figure 1.2. Photo of AD202JNATI




Figure 1.4 Photo of AD202JYATI

## FEATURES

- Isolated Power Outputs
- Small Size: 4 Channels/Inch Low
- Uncommitted Input Amplifier
- High CMR: 130dB (Gain = 100V/V)
- High Accuracy: ±0.02% Max Nonlinearity
- High CMV Isolation: ±1000V Continuous

## APPLICATIONS

It can be applied for multichannel data acquisition, current shunt measurements motor controls, process signal isolation, high voltage instrumentation amplifier, etc.

## DESCRIPTION

**Upgraded Drop-in Replacement for AD202JY**

**We guarantee production for ≥10 years.**

The AD202JYATI is a high voltage isolation amplifier designed for multiple applications where input signals are measured, processed, or transmitted without a galvanic connection. These isolation amplifiers in SIP package offer a signal and power isolation function.

With internal transformer-coupling, the AD202JYATI provides total galvanic isolation between the input and output stages of the isolation amplifier. These amplifiers eliminate the need for an external DC-DC converter, which allows the designer to minimize the necessary circuit overhead, thus reducing the overall design and component costs.

The AD202JYATI is powered directly from a 15V DC power supply, featuring small size, high accuracy, low power, wide bandwidth, excellent performance, flexible input, isolated power, etc.

## INSIDE THE AD202JYATI

The AD202JYATI uses an amplitude modulation technique to permit transformer coupling of signals down to dc (Figure 2). It also contains an uncommitted input op amp and a power transformer that provides isolated power to the op amp, the modulator, and any external load. The power transformer primary is driven by a 3MHz, $15V_{P-P}$ square wave generated internally.


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/21/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 

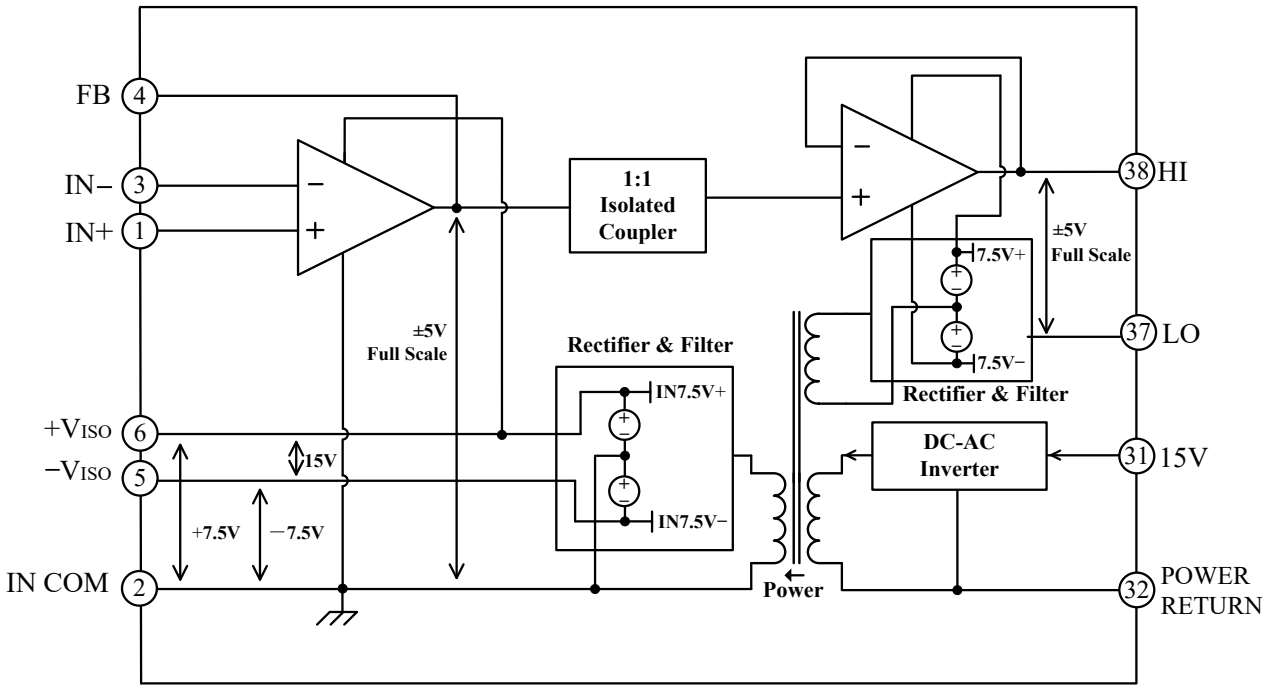



Figure 2. AD202JYATI Functional Block Diagram

## SPECIFICATIONS

Table 1. Electrical characteristics. (Typical @ 25°C and $V_S$ = 15V unless otherwise noted.)

| Model | AT202JY |
|---|---|
| GAIN | |
| Range | 1V/V–100 V/V |
| Error | ±0.5% typ (±4% max) |
| vs. Temperature | ±20ppm/°C typ (±45ppm/°C max) |
| vs. Time | ±50 ppm/1000 Hours |
| vs. Supply Voltage | ±0.01%/V |
| Nonlinearity (G = 1V/V) | ±0.02% max |
| Nonlinearity vs. Isolated Supply Load | ±0.0015%/mA |
| INPUT VOLTAGE RATINGS | |
| Input Voltage Range | ±5V |
| Max Isolation Voltage (Input to Output) | |
| AC, 60Hz, Continuous | 750Vrms |
| Continuous (AC and DC) | ±1000V Peak |
| CMRR (Common-Mode Rejection Ratio)* | −74dB |
| CMTC(Common-Mode Transfer Coefficient)* | $-0.2\times10^{3}$ |
| RS ≤ 100Ω (HI and LO Inputs) G = 1V/V | 105dB |
| G = 100V/V | 130dB |
| RS ≤ 1 kΩ (Input HI, LO, or Both) G = 1V/V | 100dB min |
| G = 100V/V | 110dB min |
| Leakage Current Input to Output @ 240Vrms, 60 Hz | 2µA rms max |
| INPUT IMPEDANCE | |
| Differential (G = 1V/V) | $10^{12}\Omega$ |
| Common-Mode | 2GΩ\|4.5pF |
| INPUT BIAS CURRENT | |
| Initial, @ 25°C | ±30pA |
| vs. Temperature (0°C to 70°C) | ±10nA |
| INPUT DIFFERENCE CURRENT | |
| Initial, @ 25°C | ±5pA |
| vs. Temperature (0°C to 70°C) | ±2nA |
| INPUT NOISE | |
| Voltage, 0.1Hz to 10Hz | $1.8\mu V_{P-P}$ |
| f > 100Hz | $10.8nV/\sqrt{Hz}$ |


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/21/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 

| Model | AT202JY |
|---|---|
| FREQUENCY RESPONSE | |
| Bandwidth ($V_O \le 10V_{P-P}$, G = 1V–50V/V) | 800kHz |
| Settling Time, to ±10mV (10V Step) | 1ms |
| OFFSET VOLTAGE (RTI) | |
| Initial, @ 25°C Adjustable to Zero | (±5 ± 5/G)mV max |
| vs. Temperature (0°C to 70°C) | $[\pm 10 \pm \frac{10}{G}]$ µV/°C |
| RATED OUTPUT | |
| Voltage (Out HI to Out LO) | ±5V |
| Output Resistance | 750Ω |
| Output Ripple, 100kHz Bandwidth | $10mV_{P-P}$ |
| 5kHz Bandwidth | 0.5mV rms |
| ISOLATED POWER OUTPUT | |
| Voltage, No Load | ±7.5V |
| Accuracy | ±10% |
| Current | 400µA Total |
| Regulation, No Load to Full Load | 5% |
| Ripple | $100mV_{P-P}$ |
| POWER SUPPLY | |
| Voltage, Rated Performance | 15V±5% |
| Voltage, Operating | 15V±10% |
| Current, No Load ($V_S$ = 15V) | 12mA |
| TEMPERATURE RANGE | |
| Rated Performance | 0°C to 70°C |
| Operating | −40°C to +85°C |
| Storage | −40°C to +85°C |
| PACKAGE DIMENSIONS | |
| SIP Package (N) | 2.08"×0.26"×0.78" |

*Test Schematic Figure 3 @ 100Hz Sine Wave @$v_S(t)$ = 1000V.

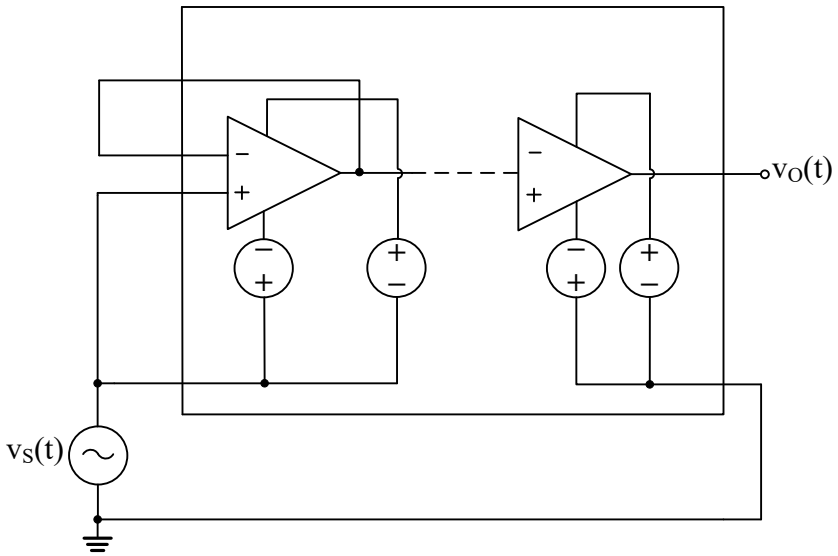



Figure 3. CMRR & CMTC Test Schematic


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/21/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 

## PIN DESIGNATIONS

| Block | Pin # | Pin Name | Type | Function Description |
|---|---|---|---|---|
| **Isolated Block** | 1 | IN+ | Isolated analog input | Isolated positive (Non-inverting) input |
| | 2 | IN COM | Isolated analog ground | Isolated ground |
| | 3 | IN− | Isolated analog input | Isolated negative (inverting) input |
| | 6 | +VISO OUT | Isolated power output | Isolated positive power supply output, +7.5V, referenced to pin 2 IN COM |
| | 5 | −VISO OUT | Isolated power output | Isolated negative power supply output, approximately −7.0V, referenced to pin 2 IN COM |
| | 4 | FB | Isolated analog output | Isolated op amp output as a feedback signal |
| Local Block | 37 | LO | Analog output | Low Voltage Output |
| | 38 | HI | Analog output | High Voltage Output |
| | 31 | 15 V | Analog input | Positive 15V power supply input |
| | 32 | POWER RETURN | Analog input | Power supply return |

## RISE TIME

1. Connect pin FB and pin IN−. Provide a −2V ~ +2V voltage to pin IN+. The rise time = 500ns.

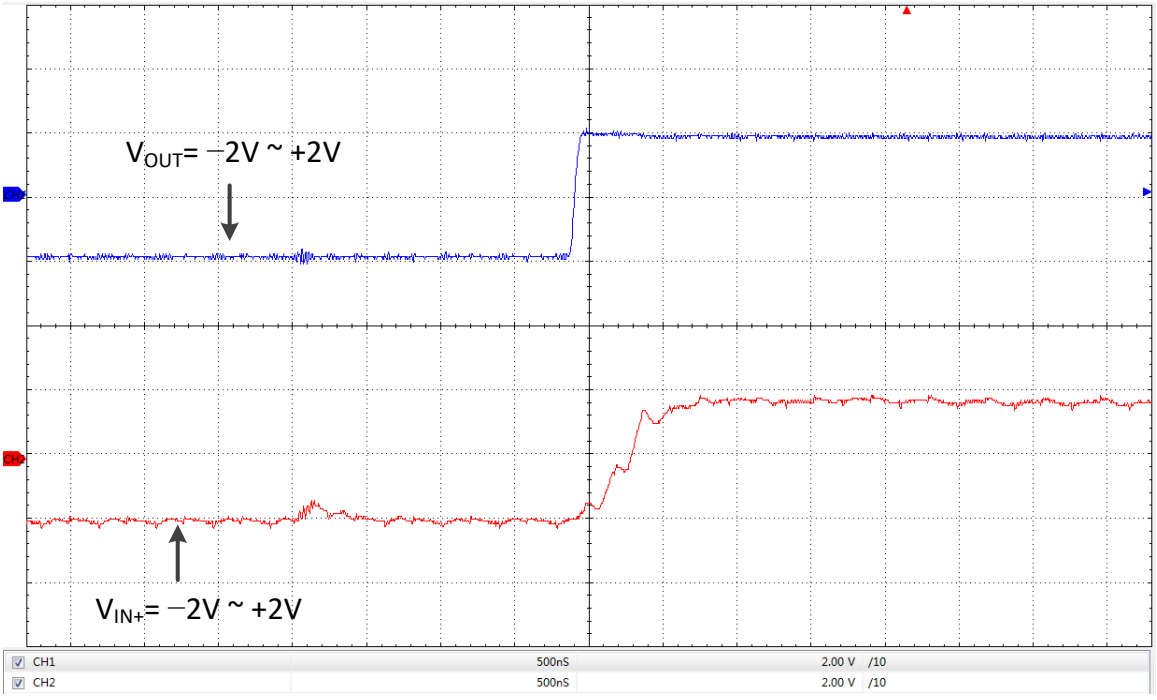



Figure 4. Rise time @ $V_{IN+}$ = −2V ~ +2V


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/21/2026 

2. Connect pin FB and pin IN−. Provide a −5V ~ +5V voltage to pin IN+. The rise time = 1μs.

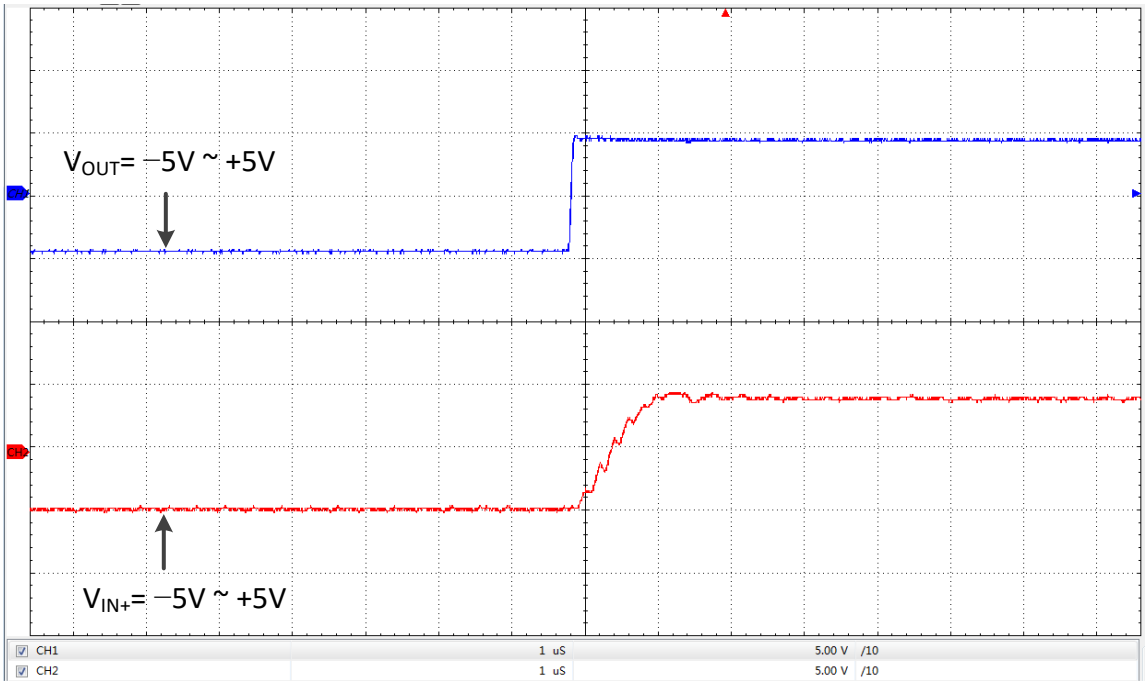



Figure 5. Rise time @ $V_{IN+}$ = −5V ~ +5V

3. Connect pin FB and pin IN−. Provide a −5V ~ +5V voltage to pin IN+. The Frequency f = 500kHz.

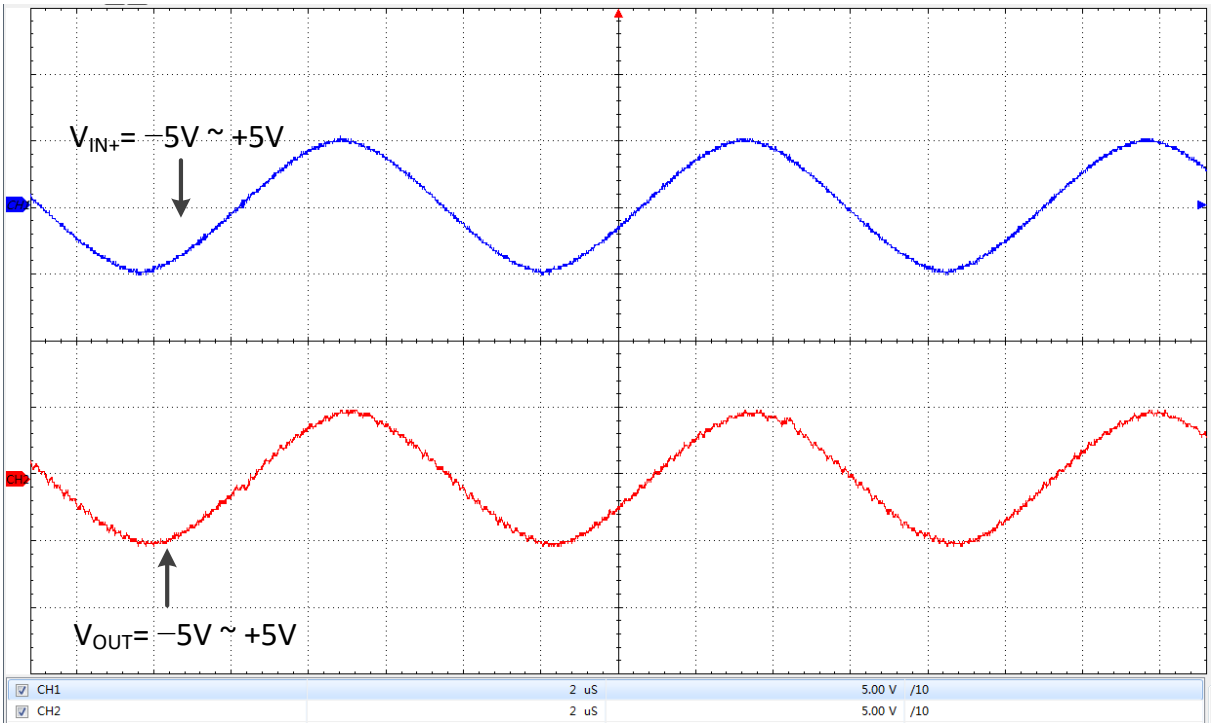



Figure 6. Frequency @ $V_{IN+}$ = −5V ~ +5V


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/21/2026 

4. Connect pin FB and pin IN−. Provide a −5V ~ +5V voltage to pin IN+. The Frequency f = 50Hz.

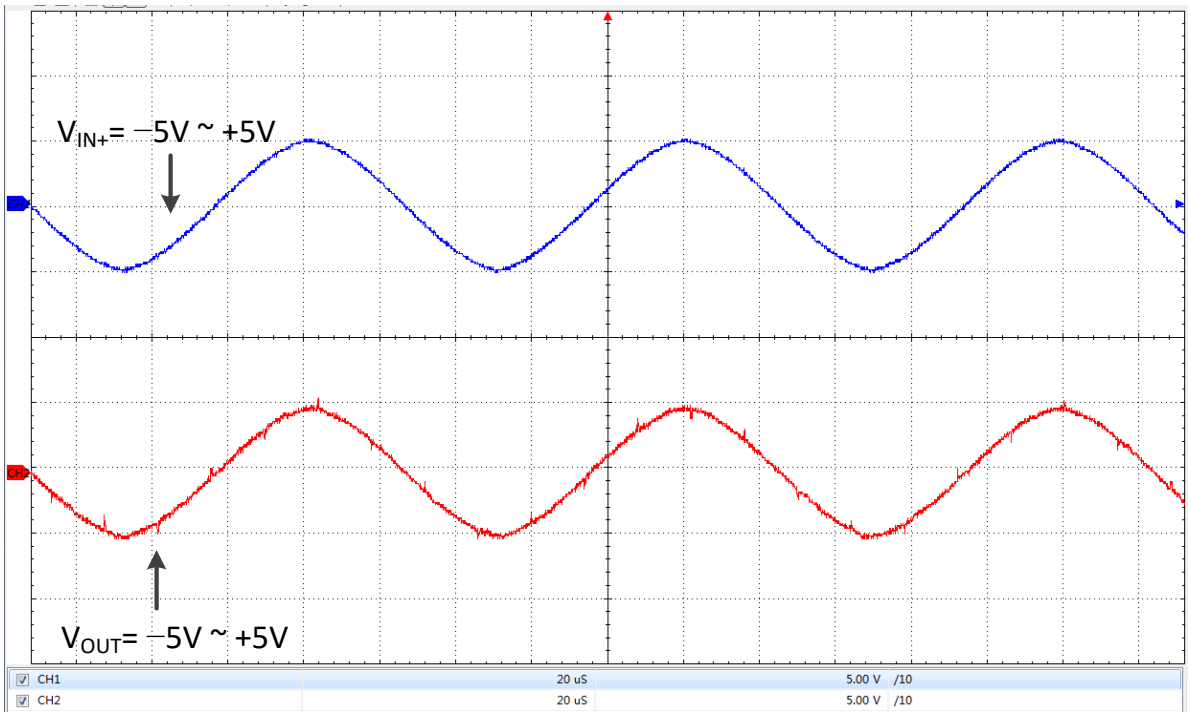



Figure 7. Frequency @ $V_{IN+}$ = −5V ~ +5V

5. Connect pin FB and pin IN−. Provide a −5V ~ +5V voltage to pin IN+. The Frequency f = 100Hz.

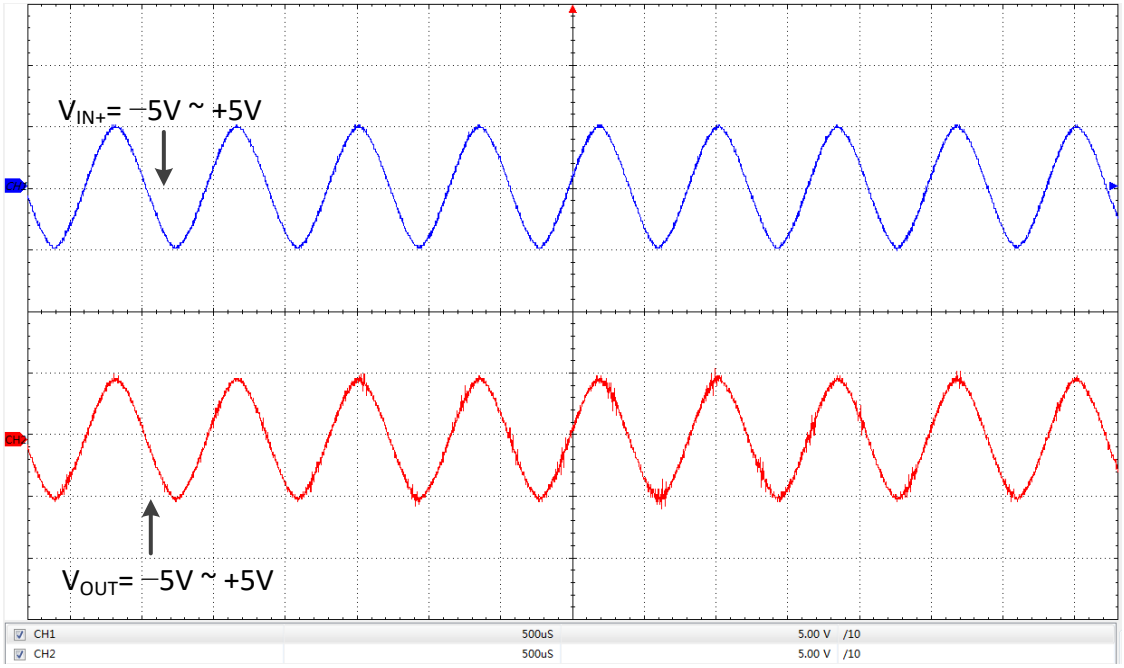



Figure 8. Frequency @ $V_{IN+}$ = −5V ~ +5V


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/21/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 

## NONLINEARITY

Connect pin FB and pin IN−. Provide a −5V ~ +5V voltage to pin IN+. The output voltage is as follows.

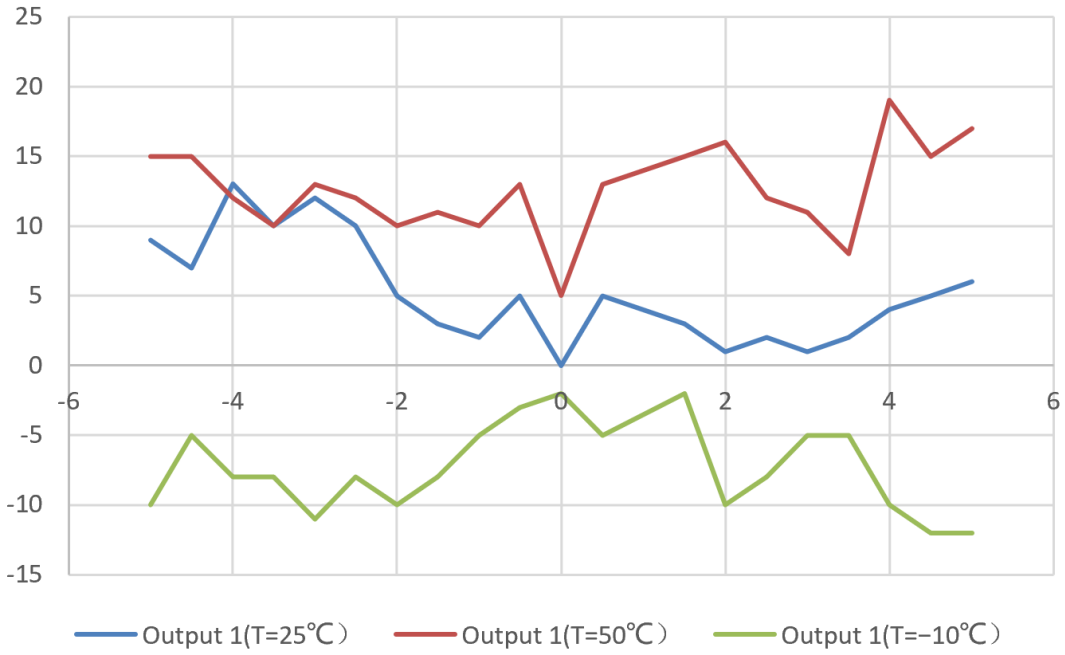



Figure 9. Nonlinearity

## MECHANICAL DIMENSIONS

The dimensions of AD202JYATI in SIP package are shown in Figure 9.2.

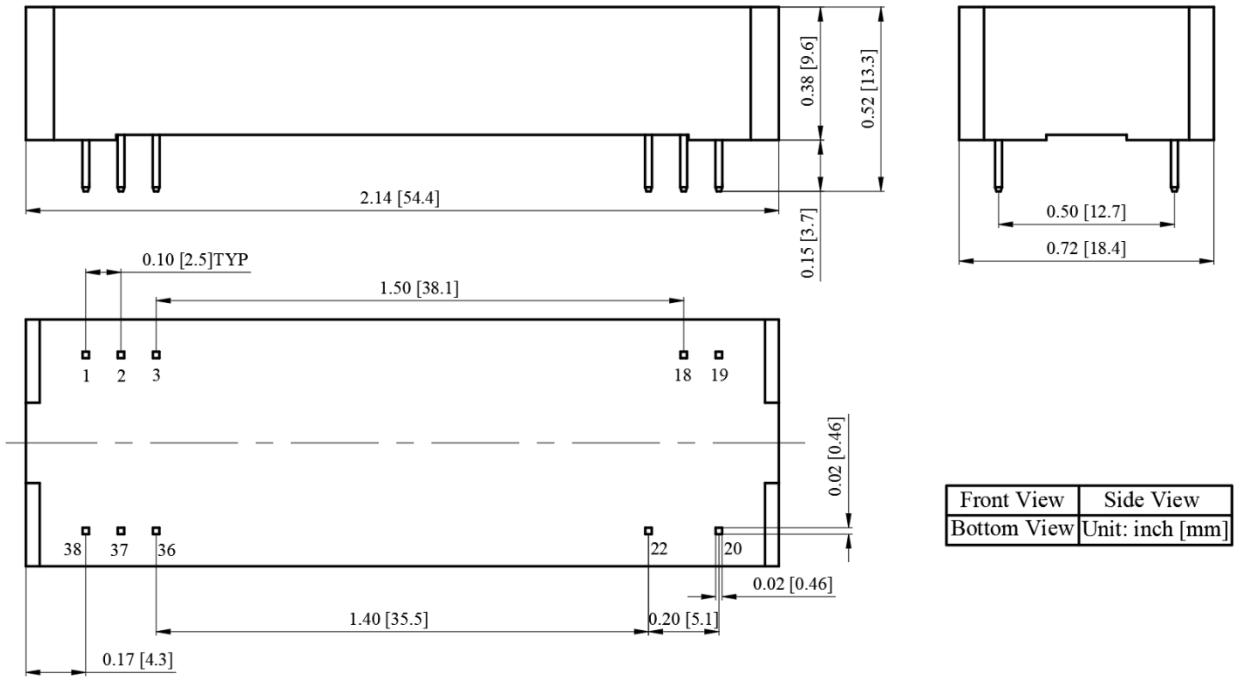



Figure 10.1. Dimensions of AD202JNATI & AD202KNATI DIP Package


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/21/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 

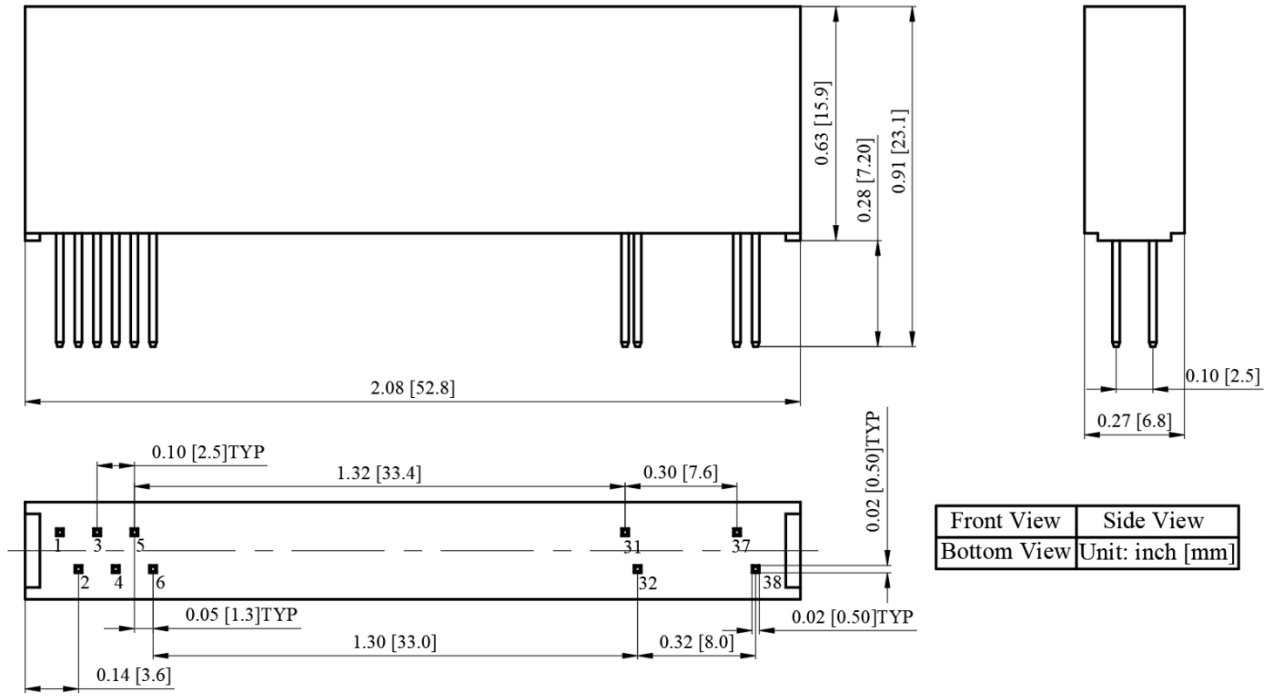



Figure 10.2. Dimensions of AD202JYATI & AD202KYATI SIP Package

**NOTICE**

1. ATI warrants performance of its products for one year to the specifications applicable at the time of sale, except for those damaged by excessive abuse. Products found not meeting the specifications within one year from the date of sale can be exchanged free of charge.

2. ATI reserves the right to make changes to its products or to discontinue any product or service without notice and advise customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current and complete.

3. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability. Testing and other quality control techniques are utilized to the extent ATI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

4. Customers are responsible for their applications using ATI products. In order to minimize risks associated with the customers' applications, adequate design and operating safeguards must be provided by the customers to minimize inherent or procedural hazards. ATI assumes no liability for applications assistance or customer product design.

5. ATI does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of ATI covering or relating to any combination, machine, or process in which such products or services might be or are used. ATI's publication of information regarding any third party's products or services does not constitute ATI's approval, warranty or endorsement thereof.


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/21/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 

6. IP (Intellectual Property) Ownership: ATI retains the ownership of full rights for special technologies and/or techniques embedded in its products, the designs for mechanics, optics, plus all modifications, improvements, and inventions made by ATI for its products and/or projects.


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/21/2026 