


Figure 1. Physical Photos of AHVR15V3KV3R3MAP

## FEATURES

- Output Voltage Proportional to Input Voltage
- Output Voltage from 0 to 3000V
- Input Voltage from 0.7V to 15V
- Low Power Consumption
- High Efficiency
- High Stability
- Low Turn-on Voltage 0.7VDC
- Input to Output Isolation
- Small Output Ripple, Time Drift, and Temperature Drift
- Overload and Short Circuit Protection
- Metal Enclosure for Zero EMIS
- Easy Control and Installation

## APPLICATIONS

This power module, AHVR15V3KV3R3MAP, is designed for achieving DC-DC conversion from low voltage to high voltage as a power supply source. It can be used for:

- X-ray Machine
- Spectral Analysis
- Nondestructive Inspection
- Semiconductor Manufacturing Equipment
- Capillary Electrophoresis
- Physical Vapor Phase Deposition
- Electrospinning Preparation of Nanofiber
- DC Reactive Magnetron Sputtering

**Table 1. Pin Names, Functions and Specifications**

| No. | Name | Description | Type | Min. | Typ. | Max. |
|---|---|---|---|---|---|---|
| 1 | $+V_{IN}$ | Input Voltage | Power supply input | 0V | | 15V |
| 2 | $-V_{IN}$ | Input Ground | Ground for power supply | | 0V | |
| 3 | $+V_{OUT}$ | Output Voltage | Power output | 0V | | 3kV |
| 4 | $-V_{OUT}$ | Output Ground | Power output | | 0V | |
| 5 | NC | No Connect | - | | - | |


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026 

## DESCRIPTION

AHVR15V3KV3R3MAP comes with a quasi-sine wave oscillator, a fully enclosed transformer, an input and output filter, and a five-sided metal enclosure. These modules present low EMI/RFI, low noise, and low ripple. The input and output are galvanically isolated. Proportional to the input voltage, the output voltage has a typical turn-on voltage as low as 0.7V. It also comes with output short-circuit protection and a wide range of output voltage adjustments. This high voltage power supply also features ultra-small size, light weight, moisture proof, shockproof, metal enclosure, and zero EMIs.

## USING AHVR15V3KV3R3MAP

This high voltage power supply must be mounted tightly onto a metal plate, ideally, thus expanding its heating sinking capacity of the metal enclosure. Sufficient ventilation must be provided to keep the power supply surface temperature under 55°C.

## SAFETY PRECAUTIONS

Although AHVR15V3KV3R3MAP high voltage power supply comes with an over current protection circuit, a short circuit at the output should always be avoided. Make sure the high voltage wire for connecting $V_{OUT}$ node has sufficient insulation capability with its surrounding objects.

## APPLICATION NOTES

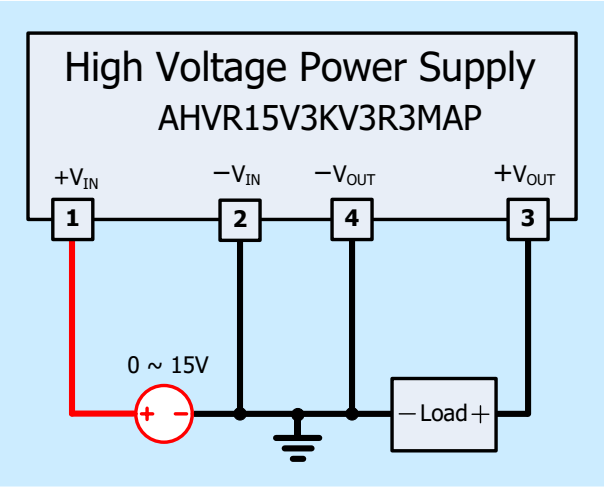



Figure 2. Positive Output

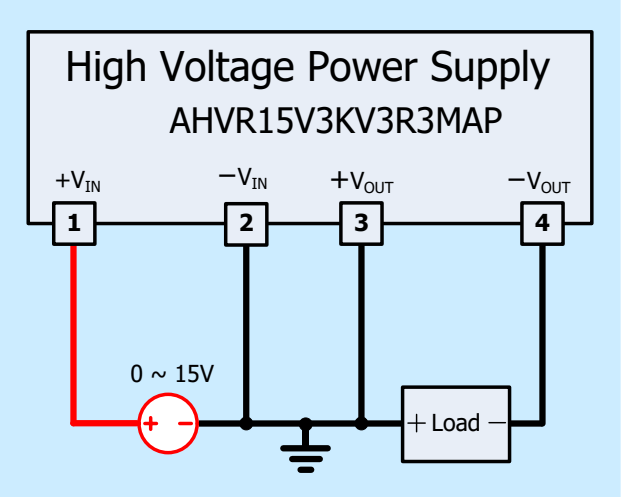



Figure 3. Negative Output

## BLOCK DIAGRAM

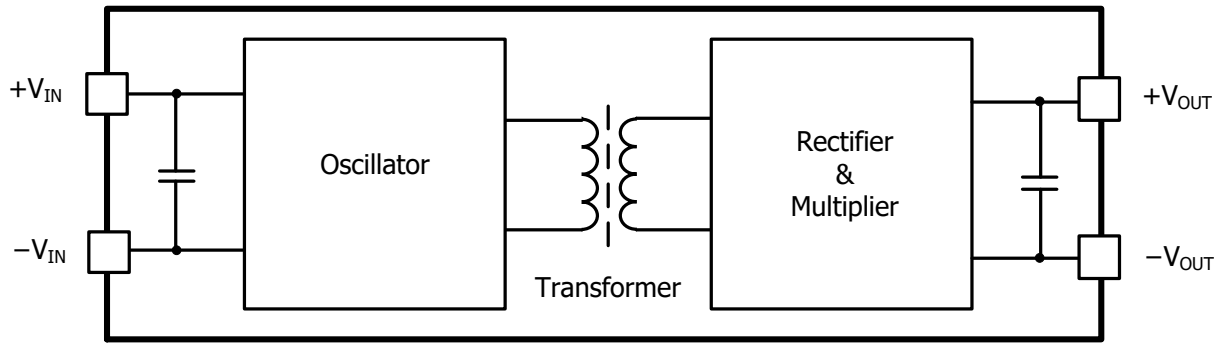



Figure 4. Block Diagram


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026 

## SPECIFICATIONS

**Table 2. Characteristics. $T_A$ = 25°C, unless otherwise noted.**

| Parameter | Symbol | Test Conditions | Min. | Typ. | Max. | Unit/Note |
|---|---|---|---|---|---|---|
| Input Power Supply Voltage | $V_{IN}$ | | 0.7 | | 15 | V |
| Input Power Supply Quiescent Current | $I_{VPS_QC}$ | $I_{VOUT}$ = 0mA | 190 | 240 | 290 | mA |
| Input Power Supply Current at Full Load | $I_{VPS_FL}$ | $I_{VOUT}$ = 3.3mA | 900 | 950 | 1000 | mA |
| Output Voltage Range | $V_{VOUT}$ | $I_{VOUT}$ = 0 ~ 3.3mA | 0 | | 3000 | V |
| Output Current Range | $I_{VOUTMAX}$ | $V_{IN}$ = 15V | 0 | | 3.3 | mA |
| Output Load Resistance Range | | | $\frac{V_{VOUT}}{I_{VOUT}}$ | | ∞ | MΩ |
| Output Voltage Tolerance | | At Max $V_{OUT}$, Full Load | | | ±5 | % |
| Output Voltage Ripple | $V_{VOUT_RP}$ | $R_{LOAD}$ = 900kΩ<br>$V_{VOUT}$ = 3000V | ≤1 | | | % |
| Response Time | $t_{RESPONSE}$ | 0 to Max $V_{OUT}$, Full Load | | 260 | | ms |
| Isolation Voltage: Input to Output | | | | 3500 | | V |
| Switching Frequency | $F_{SW}$ | | 25 | | 125 | kHz |
| Full Load Efficiency | η | $V_{VPS}$ = 15V<br>$V_{VOUT}$ = 3000V<br>$I_{VOUT}$ = 3.3mA | | ≥70 | | % |
| Output Voltage Temperature Stability | | −20 ~ 50°C | | | ±1 | % |
| Operating Temperature Range | $T_{opr}$ | | −10 | | 70 | °C |
| Storage Temperature Range | $T_{stg}$ | | −25 | | 90 | °C |
| Humidity | | Non-condensing | | 95 | | %RH |
| External Dimensions | | | 71.1×43.2×21.6 | | | mm |
| | | | 2.80×1.70×0.85 | | | inch |
| Weight | | | | 145 | | g |
| | | | | 0.32 | | lbs |
| | | | | 5.11 | | Oz |


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 

## TESTING DATA

Test conditions: $V_{VPS}$ = 15V, $T_A$ = 25°C, $R_{LOAD}$ = 900kΩ

The measured output voltage, $V_{VOUT}$, corresponding to the input voltage, $V_{IN}$, is shown in Figure 5.

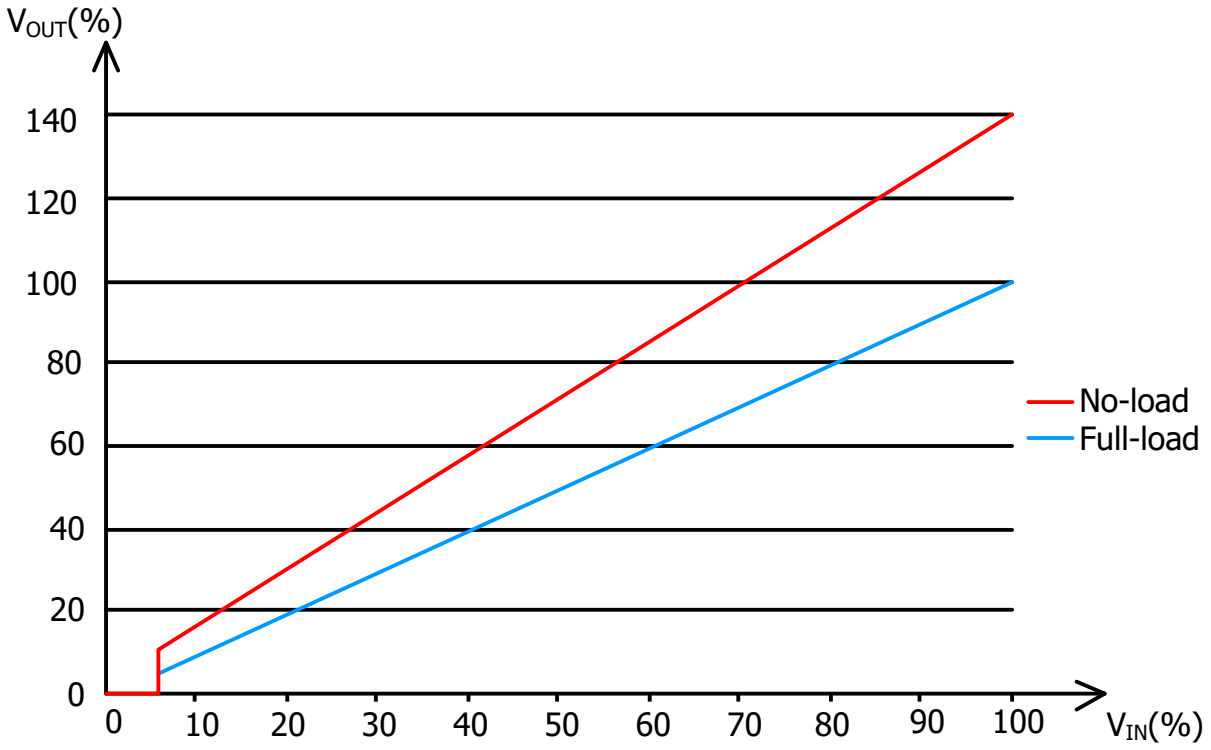



Figure 5. $V_{IN}$ vs. $V_{VOUT}$

## NAMING PRINCIPLE

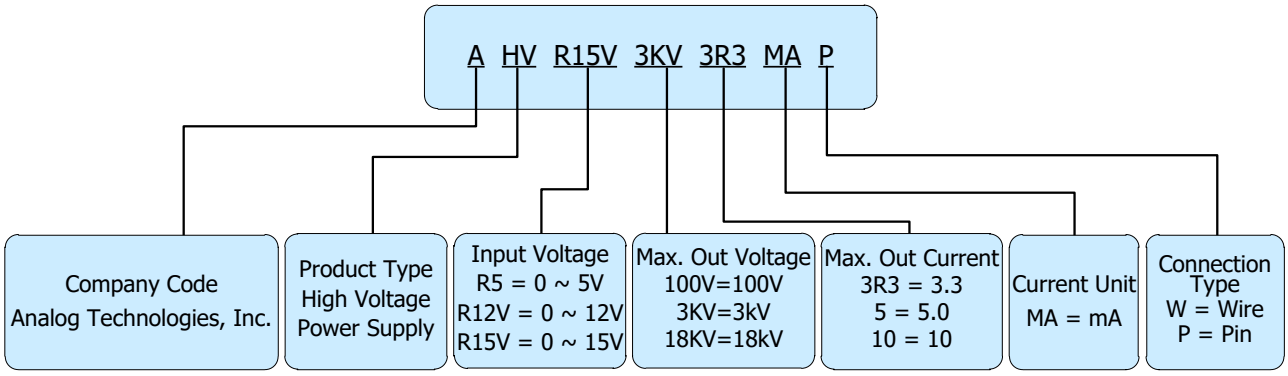



Figure 6. Naming Principle of AHVR15V3KV3R3MAP


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 

# DIMENSIONS

**Pin Layout**

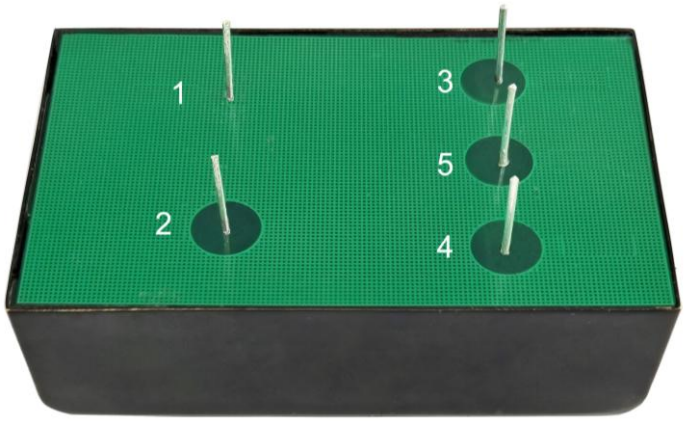



Figure 7. Pin Layout for AHVR15V3KV3R3MAP

**Outline Dimensions**

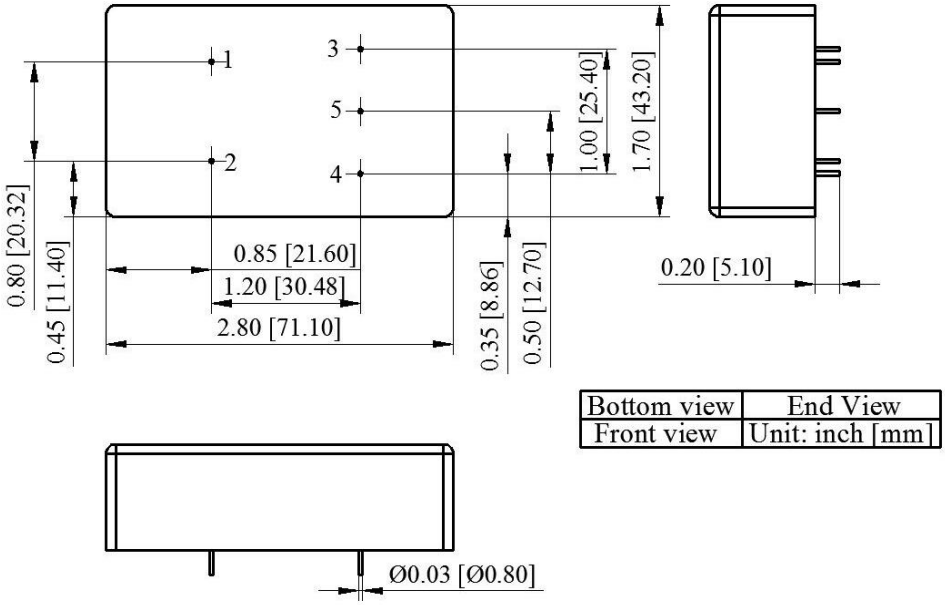



Figure 8. Outline Dimensions

# ORDERING INFORMATION

| Part Number | Buy Now |
|---|---|
| AHVR15V3KV3R3MAP | * * |

*: both and are our online store icons. Our products can be ordered from either one of them with the same pricing and delivery time.


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 

## RELATED PRODUCTS

| Part # | Datasheet | Output Type | Output Voltage (V) | Output Current (mA) | Input Voltage (V) | Ripple (%) | Buy Now* |
|---|---|---|---|---|---|---|---|
| AHVR12V100V100MAP | | Single Output | 0 ~ 100 or 0 ~ −100 | 100 | 0 ~ 12 | <0.6 | |
| AHVR12VPN100V50MAP2 | Contact Us | Dual Output | 0 ~ ±100 | 50 | 0 ~ 12 | <1.0 | Contact Us |
| AHVR12V200V50MAP | | Single Output | 0 ~ 200 or 0 ~ −200 | 50 | 0 ~ 12 | <1.0 | |
| AHVR12V300V33R3MAP | | Single Output | 0 ~ 300 or 0 ~ −300 | 33.3 | 0 ~ 12 | <1.0 | |
| AHVR12VPN150V33R3MAP2 | Contact Us | Dual Output | 0 ~ ±150 | 33.3 | 0 ~ 12 | <1.0 | Contact Us |
| AHVR12V400V25MAP | Contact Us | Single Output | 0 ~ 400 or 0 ~ −400 | 25 | 0 ~ 12 | <1.0 | Contact Us |
| AHVR12VPN200V25MAP2 | Contact Us | Dual Output | 0 ~ ±200 | 25 | 0 ~ 12 | <1.0 | Contact Us |
| AHVR12V500V20MAP | | Single Output | 0 ~ 500 or 0 ~ −500 | 20 | 0 ~ 12 | <1.0 | |
| AHVR12V600V16MAP | | Single Output | 0 ~ 600 or 0 ~ −600 | 16 | 0 ~ 12 | <1.0 | |
| AHVR12VPN300V25MAP2 | Contact Us | Dual Output | 0 ~ ±300 | 16 | 0 ~ 12 | <1.0 | Contact Us |
| AHVR12V800V12R5MAP | | Single Output | 0 ~ 800 or 0 ~ −800 | 12.5 | 0 ~ 12 | <1.0 | |
| AHVR12V1KV10MAP | | Single Output | 0 ~ 1000 or 0 ~ −1000 | 12.5 | 0 ~ 12 | <1.0 | |
| AHVR12VPN500V10MAP2 | Contact Us | Dual Output | 0 ~ ±500 | 10 | 0 ~ 12 | <1.0 | Contact Us |
| AHVR12V1200V8R3MAP | | Single Output | 0 ~ 1200 or 0 ~ −1200 | 8.3 | 0 ~ 12 | <1.0 | |
| AHVR12VPN600V8R3MAP2 | Contact Us | Dual Output | 0 ~ ±600 | 8.3 | 0 ~ 12 | <1.0 | Contact Us |
| AHVR12V1500V6R6MAP | | Single Output | 0 ~ 1500 or 0 ~ −1500 | 6.6 | 0 ~ 12 | <1.0 | |
| AHVR12VPN750V6R6MAP2 | Contact Us | Dual Output | 0 ~ ±750 | 6.6 | 0 ~ 12 | <1.0 | Contact Us |
| AHVR12V2KV5MAP | | Single Output | 0 ~ 2000 or 0 ~ −2000 | 5 | 0 ~ 12 | <1.0 | |
| AHVR15V3KV3R3MAP | | Single Output | 0 ~ 3000 or 0 ~ −3000 | 3.3 | 0 ~ 15 | <1.0 | |
| AHVR15VPN1500V3R3MAP2 | Contact Us | Dual Output | 0 ~ ±1500 | 3.3 | 0 ~ 15 | <1.0 | Contact Us |
| AHVR15V4KV2R5MAP | | Single Output | 0 ~ 4000 or 0 ~ −4000 | 2.5 | 0 ~ 15 | <1.0 | |
| AHVR15VPN2KV2R5MAP2 | Contact Us | Dual Output | 0 ~ ±2000 | 2.5 | 0 ~ 15 | <1.0 | Contact Us |
| AHVR15V5KV2MAP | | Single Output | 0 ~ 5000 or 0 ~ −5000 | 2.0 | 0 ~ 15 | <1.0 | |
| AHVR15VPN2500V2MAP2 | Contact Us | Dual Output | 0 ~ ±2500 | 2.0 | 0 ~ 15 | <1.0 | Contact Us |
| AHVR15V6KV1R66MAP | Contact Us | Single Output | 0 ~ 6000 or 0 ~ −6000 | 1.66 | 0 ~ 15 | <1.0 | Contact Us |
| AHVR15VPN3KV2MAP2 | Contact Us | Dual Output | 0 ~ ±3000 | 1.66 | 0 ~ 15 | <1.0 | Contact Us |
| AHVR15V8KV1R25MAP | Contact Us | Single Output | 0 ~ 8000 or 0 ~ −8000 | 1.25 | 0 ~ 15 | <2.5 | Contact Us |
| AHVR15VPN4KV1R25MAP2 | Contact Us | Dual Output | 0 ~ ±4000 | 1.25 | 0 ~ 15 | <2.5 | Contact Us |
| AHVR15V10KV1MAP | Contact Us | Single Output | 0 ~ 10000 or 0 ~ −10000 | 1.25 | 0 ~ 15 | <2.5 | Contact Us |
| AHVR15V12KVR83MAP | Contact Us | Single Output | 0 ~ 12000 or 0 ~ −12000 | 0.83 | 0 ~ 15 | <2.5 | Contact Us |
| AHVR15VPN6KVR83MAP2 | Contact Us | Dual Output | 0 ~ ±6000 | 0.83 | 0 ~ 15 | <2.5 | Contact Us |


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 

## NOTICE

1. It is important to carefully read and follow the warnings, cautions, and product-specific notes provided with electronic components. These instructions are designed to ensure the safe and proper use of the component and to prevent damage to the component or surrounding equipment. Failure to follow these instructions could result in malfunction or failure of the component, damage to surrounding equipment, or even injury or harm to individuals. Always take the necessary precautions and seek professional assistance if unsure about proper use or handling of electronic components.
2. Please note that the products and specifications described in this publication are subject to change without prior notice as we continuously improve our products. Therefore, we recommend checking the product descriptions and specifications before placing an order to ensure that they are still applicable. We also reserve the right to discontinue the production and delivery of certain products, which means that not all products named in this publication may always be available.
3. This means that while ATI may provide information about the typical requirements and applications of their products, they cannot guarantee that their products will be suitable for all customer applications. It is the responsibility of the customer to evaluate whether an ATI product with the specified properties is appropriate for their particular application.
4. ATI warrants its products to perform according to specifications for one year from the date of sale, except when damaged due to excessive abuse. If a product fails to meet specifications within one year of the sale, it can be exchanged free of charge.
5. ATI reserves the right to make changes or discontinue products or services without notice. Customers are advised to obtain the latest information before placing orders.
6. All products are sold subject to terms and conditions of sale, including those pertaining to warranty, patent infringement, and limitation of liability. Customers are responsible for their applications using ATI products, and ATI assumes no liability for applications assistance or customer product design.
7. ATI does not grant any license, either express or implied, under any patent right, copyright, mask work right, or other intellectual property right of ATI.
8. ATI's publication of information regarding third-party products or services does not constitute approval, warranty, or endorsement.
9. ATI retains ownership of all rights for special technologies, techniques, and designs for its products and projects, as well as any modifications, improvements, and inventions made by ATI.
10. Despite operating the electronic modules as specified, malfunctions or failures may occur before the end of their usual service life due to the current state of technology. Therefore, it is crucial for customer applications that require a high level of operational safety, especially in accident prevention or life-saving systems where the malfunction or failure of electronic modules could pose a risk to human life or health, to ensure that suitable measures are taken. The customer should design their application or implement protective circuitry or redundancy to prevent injury or damage to third parties in the event of an electronic module malfunction or failure.


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A. 