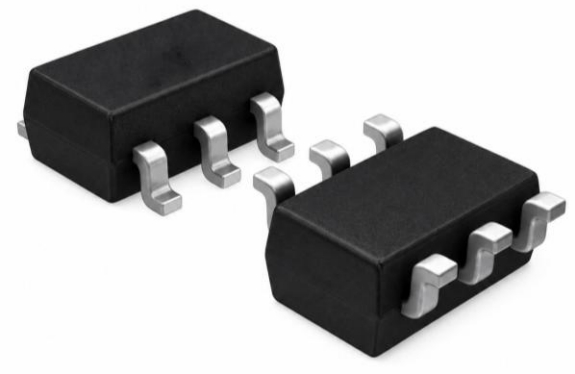


Figure 1. Physical Photos of AT8023D

FEATURES

- Max input voltage: 40V. Limit operating voltage: 30V. Recommended safe working voltage: 5~24V (The recommended safe operating voltage range is for commercially available 9~12 relays (Internal resistance is about 50Ω), Other specifications of relays should be determined according to the measured conditions.
- Limit operating current: 800mA
- The input high low conversion level is about 1.5V, which is compatible with various microcontrollers
- Integrated high speed continuation diode with built-in reverse voltage function to cancel TVS tubes in general applications
- Typical operating power: 5W (It is equivalent to 400mA output current at 12Vworkingvoltage. When the working voltage increases, the corresponding output current should decrease.)
- Limit power: 10W (It is equivalent to 800mA output current at 12V working voltage. When the working voltage increases, the corresponding output current should decrease. Working beyond the limit can cause chip damage.)


APPLICATIONS

- Smart Meter
- Motor Drive
- Magnetic Latching Relay Control

DESCRIPTION

AT8023D is a bi-direction relay driver circuit, used to control the DC motor and the magnetic latching relay, with large output capability, ultra-low power consumption. It can be widely used in smart meters and other pulses, level control applications.

PIN CONFIGURATIONS

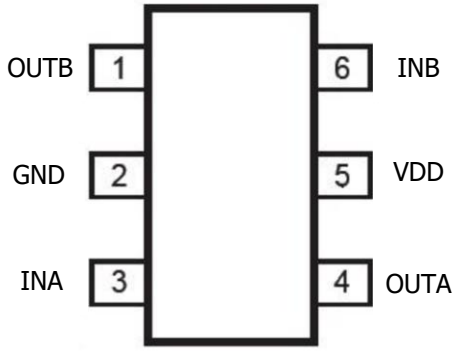

PIN DESCRIPTION

Table 1: Pin Function

Pin #	Symbol	Description
5	VDD	Power Supply Input Voltage.
2	GND	Ground.
3	INA	Input A.
4	OUTA	Output A.
6	INB	Input B.
1	OUTB	Output B.

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/11/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A.

Table 2. Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Power Supply Input Voltage	V_{DD} – V_{GND}	40	V
OUTA or OUTB Voltage	V_{OUTA} or V_{OUTB}	40	V
Other Input or Output Voltage	V_{IN} or V_{OUT}	(V_{GND} – 0.4) ~ (V_{DD} + 0.4)	V
Max. Junction Temperature	T_J	150	°C
Operating Temperature	T_O	–40 ~ 85	°C
Storage Temperature	T_{STG}	–65 ~ 150	°C
Thermal Resistance (Junction to Ambient)	θ_{JA}	120	°C/W
ESD (Human-Body Model)	HBM	8000	V
ESD (Machine Model)	MM	200	V

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

ELECTRICAL CHARACTERISTICS

(At T_A = +25°C, unless otherwise noted.)

Table 3.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static Shutdown Characteristics						
Output Breakdown Current	BV_{DSS}	V_{INA} = V_{INB} = 0V, I_D = 250μA	40			V
Output Leakage Current	I_{DSS}	V_{INA} = V_{INB} = 0V, V_D = 24V			10	μA
Static Opening Characteristics						
Input Threshold Voltage	V_{TH}			1.5	2	V
Output On-Resistance	$R_{DS(ON)}$	V_{DD} = 12V, R_L = 80Ω		7	10	V
		V_{DD} = 30V, R_L = 80Ω		6	10	
		V_{DD} = 12V, R_L = 40Ω		7	10	
		V_{DD} = 30V, R_L = 40Ω		6	10	

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Input Characteristics						
Equivalent Input Resistor	R_{IN}	V_{DD} = 12V, V_{INA} = V_{INB} = 0V		120		kΩ
Input Current	I_{IN}	V_{INA} = 3V or V_{INB} = 3V		250	400	μA
		V_{INA} = 5V or V_{INB} = 5V		450	600	μA
FWD Characteristics						
Forward Conduction Voltage	V_{SD}	I_S = 1A		1.5	2	V
Reverse Recovery Time	T_{RR}	V_{DD} = 12V, R_L = 80Ω		190		ns
Transmission Characteristics						
Rise Time	T_R	V_{DD} = 12V, R_L = 80Ω		50		ns
Turn On Delay Time	$T_{D(ON)}$	V_{DD} = 12V, R_L = 80Ω		60		ns
Fall Time	T_F	V_{DD} = 12V, R_L = 80Ω		50		ns
Turn Off Delay Time	$T_{D(OFF)}$	V_{DD} = 12V, R_L = 80Ω		2		ns

BLOCK DIAGRAM

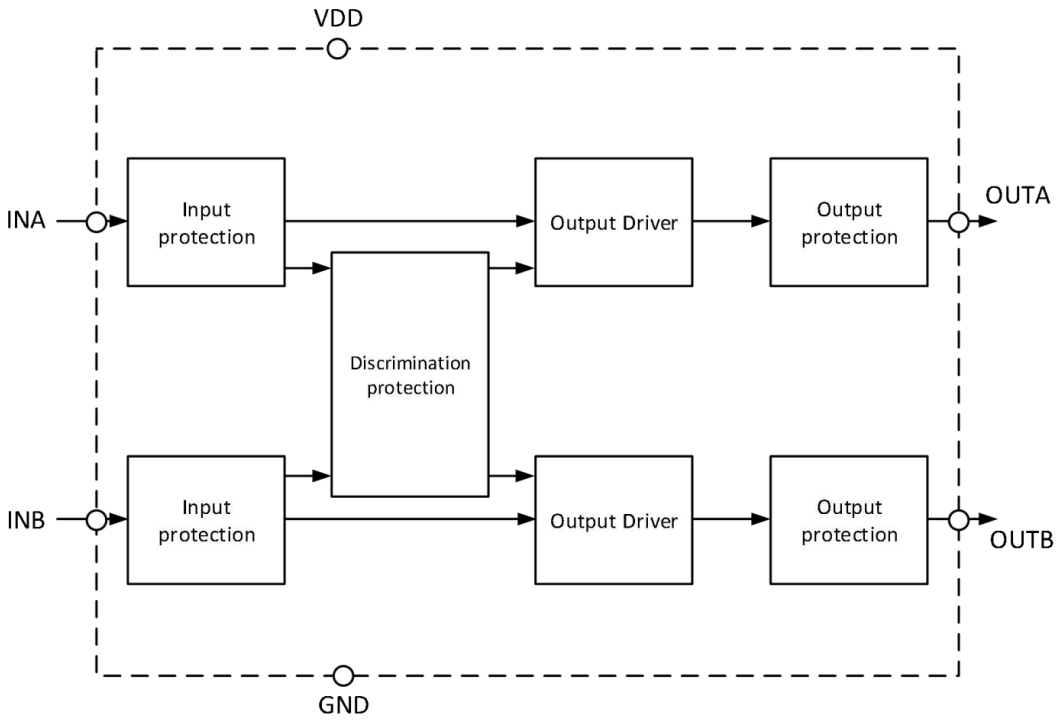


Figure 2. Block Diagram

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved.

APPLICATION CIRCUITS

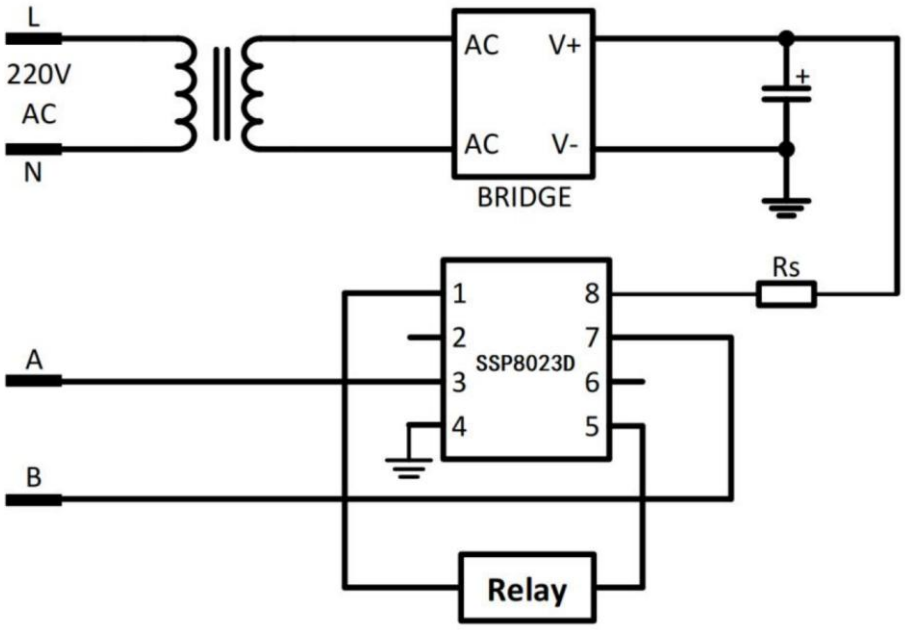


Figure 3. Typical Application Circuits

The input terminals A and B are triggered by pulse. The input terminal of the chip is connected with the output terminal of the corresponding device to work. The trigger pulse is triggered according to the function list state and the relay acts accordingly. In smart meter applications, the recommended pulse width=100ms. The length of the intervals should be longer than 100ms. These intervals include: intervals between forward drive pulse and next backward drive pulse, intervals between forward drive pulse and next forward drive pulse, intervals between backward drive pulse and next forward drive pulse, intervals between backward drive pulse and next backward drive pulse.


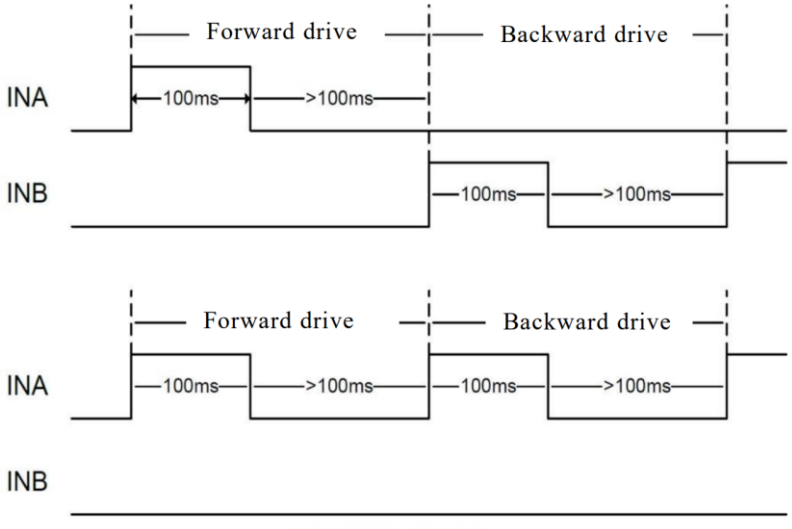


Figure 4. Schematic Diagram Of Pulse Excitation


©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/11/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A.

Recommended circuit

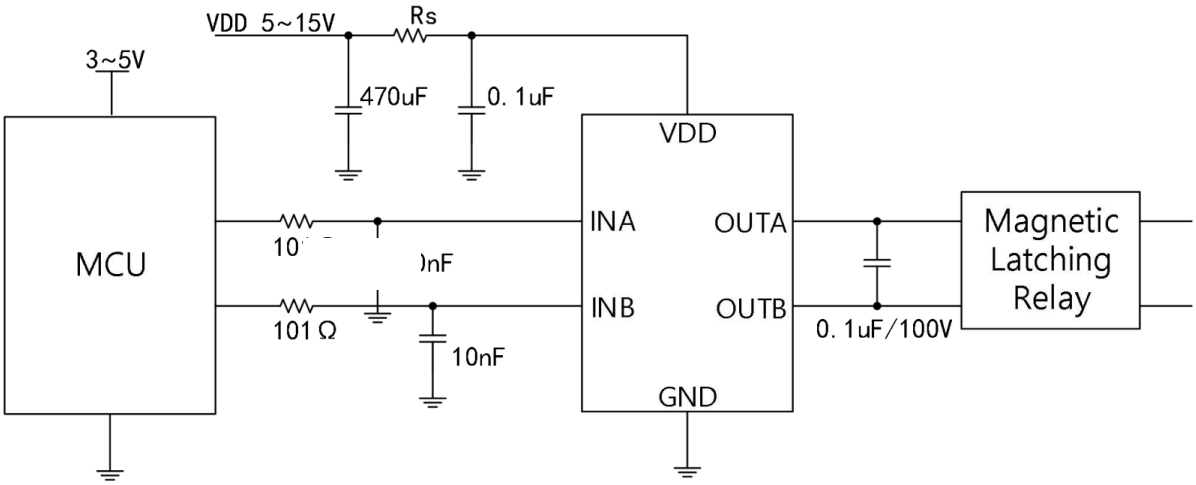

OUTLINE DIMENSIONS

SOT23-6

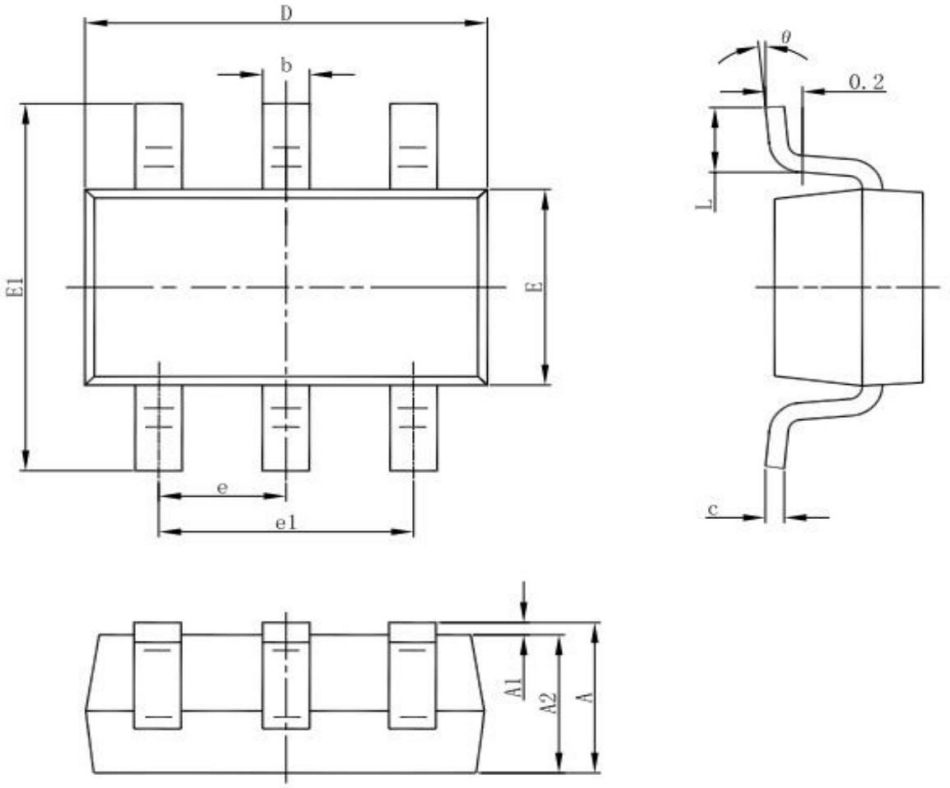

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/11/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A.

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

ORDERING INFORMATION

Part Number	Buy Now
AT8023D	

NOTICE

1. It is important to carefully read and follow the warnings, cautions, and product-specific notes provided with electronic components. These instructions are designed to ensure the safe and proper use of the component and to prevent damage to the component or surrounding equipment. Failure to follow these instructions could result in malfunction or failure of the component, damage to surrounding equipment, or even injury or harm to individuals. Always take the necessary precautions and seek professional assistance if unsure about proper use or handling of electronic components.
2. Please note that the products and specifications described in this publication are subject to change without prior notice as we continuously improve our products. Therefore, we recommend checking the product descriptions and specifications before placing an order to ensure that they are still applicable. We also reserve the right to discontinue the production and delivery of certain products, which means that not all products named in this publication may always be available.
3. This means that while ATI may provide information about the typical requirements and applications of their products, they cannot guarantee that their products will be suitable for all customer applications. It is the responsibility of the customer to evaluate whether an ATI product with the specified properties is appropriate for their particular application.

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/11/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A.

4. ATI warrants its products to perform according to specifications for one year from the date of sale, except when damaged due to excessive abuse. If a product fails to meet specifications within one year of the sale, it can be exchanged free of charge.
5. ATI reserves the right to make changes or discontinue products or services without notice. Customers are advised to obtain the latest information before placing orders.
6. All products are sold subject to terms and conditions of sale, including those pertaining to warranty, patent infringement, and limitation of liability. Customers are responsible for their applications using ATI products, and ATI assumes no liability for applications assistance or customer product design.
7. ATI does not grant any license, either express or implied, under any patent right, copyright, mask work right, or other intellectual property right of ATI.
8. ATI's publication of information regarding third-party products or services does not constitute approval, warranty, or endorsement.
9. ATI retains ownership of all rights for special technologies, techniques, and designs for its products and projects, as well as any modifications, improvements, and inventions made by ATI.
10. Despite operating the electronic modules as specified, malfunctions or failures may occur before the end of their usual service life due to the current state of technology. Therefore, it is crucial for customer applications that require a high level of operational safety, especially in accident prevention or life-saving systems where the malfunction or failure of electronic modules could pose a risk to human life or health, to ensure that suitable measures are taken. The customer should design their application or implement protective circuitry or redundancy to prevent injury or damage to third parties in the event of an electronic module malfunction or failure.

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 8/11/2026 1161 Ringwood Ct, #110, San Jose, CA 95131, U. S. A.