X-Ray High Voltage Power Supply

AXHV24VP50KV1MABT



Figure 1A. Physical Photo of AXHV24VP50KV1MABT

FEATURES

- High precision
- High efficiency
- High output voltage stability
- Adjustable Integrated Filament Supply
- Local and Remote Emission Control
- Voltage & Current Programming
- Overcurrent voltage protection
- Arc and Short circuit protection
- Safety Interlock
- OEM Customization Available

APPLICATIONS

AXHV24VP50KV1MABT is a high stability high voltage power supply, which is widely used in scientific research and other fields including: X-ray Tube, Thickness Gauge, Nondestructive Detection, X-ray Fluorescence, X-ray Fluoroscopy, Density Measurement, ROHS testing, Plating Measurement, Radiography, X-ray Imaging, PCB Inspection, Density Measurement, Process Control, X-ray Spectroscopy, Mineral Analysis, Life Science.

DESCRIPTION

AXHV24VP50KV1MABT is a high voltage power supply for X-ray tubes with high stability. It is designed to drive a ground filament X-ray tube with an integrated X-ray tube filament power supply. The ground filament power supply voltage is adjustable from 0 to 5.5VDC and the current is adjustable from 0 to 3.5A.

SAFETY PRECAUTIONS

High voltage power supply must be connected to ground reliably.

Do not touch the high voltage wire, unless the high voltage power supply is powered off, and the load and internal capacitors are fully discharged.

When the high voltage power supply is powered off, wait for another 5 minutes for fully discharging all the capacitors inside the power supply.

Do not operate the power supply in humid environment, and do not connect the operator to ground.

The internal protection circuit is provided in the high voltage power supply, but the high voltage short circuit shall be avoided.

Make sure the circuit is insulated perfectly, especially between the high voltage output and the surroundings so as to avoid electronic shock.

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026

SPECIFICATIONS

Table 1. Characteristics.

T_A = 25°C, unless otherwise noted

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit/Note
Input Voltage		V_{VPS}		23	24	25	V_{DC}
Input Current		I_{INFLD}	I_{OUT} = 1mA			4.25	A
Output Voltage		V_{OUT}	I_{OUT} = 0 ~ 1mA	0		50000	V
Output Current		I_{OUT}	Full load	0		1	mA
Ripple			Bandwidth = 1MHz R_{LOAD} = 20 MΩ		<0.1		$\%V_{P-P}$
Load				50		∞	MΩ
Output Control Mode				Local control 10k potentiometer or remote control 0 ~ +10V			
Monitor Voltage Out Impedance		Z_{VMON}			10		kΩ
Monitor Voltage		V_{MON}	V_{OUT} = 0 ~ 50kV	0		10	V
Monitor Current Out Impedance		Z_{VMON}			10		kΩ
Monitor Current		V_{MON}	I_{OUT} = 0 ~ 1mA	0		10	V
Output Voltage Display Accuracy					±1		%
Output Current Display Accuracy					±1		%
Remote Control Voltage			V_{CTRL}= 0 ~ 10V Z_{IN}= 10MΩ	0		50	kV
Local Control Voltage			R_P = 0 ~ 10kΩ	0		50	kV
Remote Control Current			V_{CTRL}= 0 ~ 10V Z_{IN}= 10MΩ	0		1	mA
Local Control Current			R_P = 0 ~ 10kΩ	0		1	mA
Voltage Relative Load Adjustment Ratio			R_{LOAD} = 0 ~ 50MΩ		0.01		%
Voltage Relative Input Adjustment Rate			V_{VPS} = 23V ~ 25V		<0.01		%
Current Relative Load Adjustment Ratio			R_{LOAD} = 0 ~ 50MΩ		0.01		%
Current Relative Input Adjustment Rate			V_{VPS} = 23V ~ 25V		<0.01		%
Filament Voltage				0		5.5	V
Filament Current				0		3.5	A
Instantaneous Short Circuit Current		I_{SC}			<100		mA
Full Load Efficiency		η			≥70		%
Temperature Coefficient		TCV_O	0 ~ 50°C		≤25		ppm/°C
Time Drift	Short Time Drift		After 30 minute warm up		<0.01		%/ h
	Long Time Drift				<0.02		%/8h
Output Voltage Temperature Stability			0 ~ 50°C		<±0.01		%
Operating Temperature Range		T_{opr}		0		50	°C

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit/Note
Storage Temperature Range	T_{stg}		−40		85	°C
Cooling		0~60W：Natural cooling；60~100W：Air cooling				
Humidity			20%-85% relative humidity non-condensing			
External Dimensions			150×115×65			mm
			5.91×4.53×2.56			inch
Weight				1.55		kg
				3.42		lbs
				54.67		Oz

TESTING DATA

High voltage power supply testing data (Test condition: the load is 20MΩ).

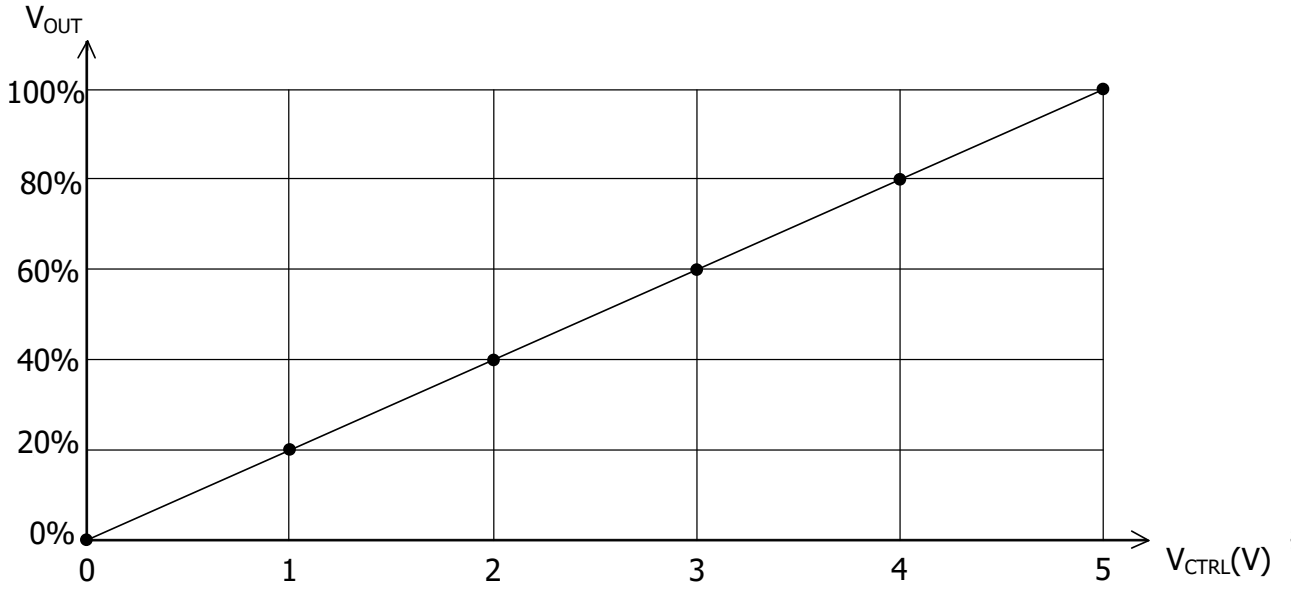


Figure 7. V_{CTRL} vs. V_{OUT}

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026

NAMING INSTRUCTIONS

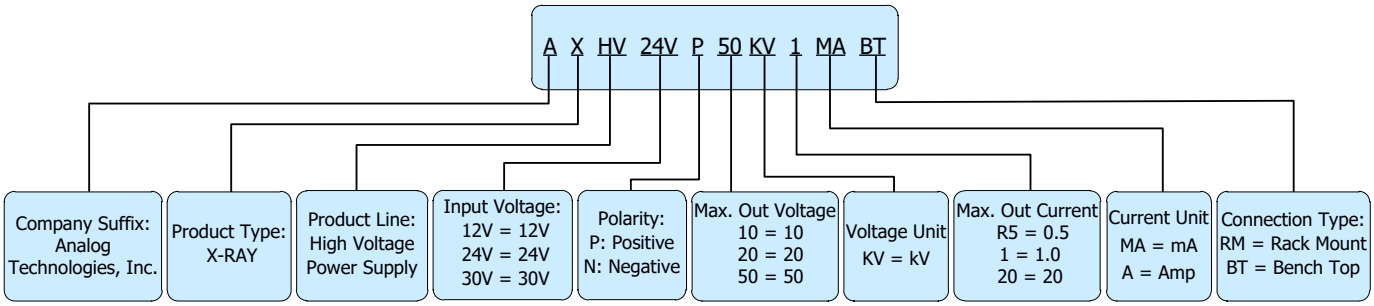


Figure 8. Naming Rules of AXHV24VP50KV1MABT

ORDERING INFORMATION

Part Number	Buy Now
AXHV24VP50KV1MABT	

*: both and are our online store icons. Our products can be ordered from either one of them with the same pricing and delivery time.

NOTICE

1. It is important to carefully read and follow the warnings, cautions, and product-specific notes provided with electronic components. These instructions are designed to ensure the safe and proper use of the component and to prevent damage to the component or surrounding equipment. Failure to follow these instructions could result in malfunction or failure of the component, damage to surrounding equipment, or even injury or harm to individuals. Always take the necessary precautions and seek professional assistance if unsure about proper use or handling of electronic components.
2. Please note that the products and specifications described in this publication are subject to change without prior notice as wecontinuously improve our products. Therefore, we recommend checking the product descriptions and specifications before placing an order to ensure that they are still applicable. We also reserve the right to discontinue the production and delivery ofcertain products, which means that not all products named in this publication may always be available.
3. This means that while ATI may provide information about the typical requirements and applications of their products, they cannot guarantee that their products will be suitable for all customer applications. It is the responsibility of the customer to evaluate whether an ATI product with the specified properties is appropriate for their particular application.
4. ATI warrants its products to perform according to specifications for one year from the date of sale, except when damaged due to excessive abuse. If a product fails to meet specifications within one year of the sale, it can be

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026

exchanged free of charge.

5. ATI reserves the right to make changes or discontinue products or services without notice. Customers are advised to obtain the latest information before placing orders.
6. All products are sold subject to terms and conditions of sale, including those pertaining to warranty, patent infringement, and limitation of liability. Customers are responsible for their applications using ATI products, and ATI assumes no liability for applications assistance or customer product design.
7. ATI does not grant any license, either express or implied, under any patent right, copyright, mask work right, or other intellectual property right of ATI.
8. ATI's publication of information regarding third-party products or services does not constitute approval, warranty, or endorsement.
9. ATI retains ownership of all rights for special technologies, techniques, and designs for its products and projects, as well as any modifications, improvements, and inventions made by ATI.
10. Please note that despite operating the passive electronic components as specified, malfunctions or failures before the end of their usual service life may still occur in individual cases due to the current state of the art. Therefore, in customer applications that require a high level of operational safety, especially those in which the malfunction or failure of a passive electronic component could pose a threat to human life or health (such as in accident prevention or life-saving systems), it is essential to ensure through suitable design of the customer application or other measures taken by the customer (such as the installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of a passive electronic component malfunction or failure.

©Copyrights 2000-2026, Analog Technologies, Inc. All Rights Reserved. Updated on 3/30/2026